



### SCOTT

**Addict SL**  
 2.600 Euro  
 Scott Sports,  
 Telefon 0 81 31/31 26-0,  
 www.scott-sports.com  
 Scott  
 Ritchey WCS, 1<sup>1/8</sup> Zoll  
 kein Zubehör  
 31,6 Millimeter

### CERVÉLO

**R3 SL**  
 3.650 Euro  
 TRI-Dynamic GmbH, Telefon  
 0 83 87/92 44 20,  
 www.tridynamic.de  
 THM Scapula  
 FSA, 1<sup>1/8</sup> Zoll  
 Sattelstütze (3t Doric)  
 27,2 Millimeter

### SPECIALIZED

**S-Works Tarmac SL2**  
 2.499 Euro  
 Specialized Europe,  
 Telefon 00 31/31/46 76 60-0,  
 www.specialized.com  
 Specialized  
 Cane Creek, oben 1<sup>1/8</sup>, unten 1,5 Zoll  
 Sattelstütze (Specialized Carbon)  
 27,2 Millimeter

### CANNONDALE







**SuperSix**  
 2.999 Euro  
 Cannondale, Telefon  
 00 41/61/48 79 380,  
 www.cannondale.com  
 Cannondale  
 FSA, oben 1<sup>1/8</sup>, unten 1,5 Zoll  
 kein Zubehör  
 31,6 Millimeter

### GIANT

**TCR Advanced**  
 2.599 Euro  
 Giant Deutschland,  
 Telefon 02 11/99 89 40,  
 www.giant-bicycles.com  
 Giant  
 Cane Creek, 1<sup>1/8</sup> Zoll  
 kein Zubehör  
 27,2 Millimeter

### LOOK

**595 Ultra Black**  
 3.300 Euro  
 Grofa,  
 Telefon 0 64 34/20 08-500,  
 www.grofa.com  
 Look HSC6  
 FSA, oben 1<sup>1/8</sup>, unten 1<sup>1/4</sup> Zoll  
 Sattelstütze (Look E-Post)  
 integriert

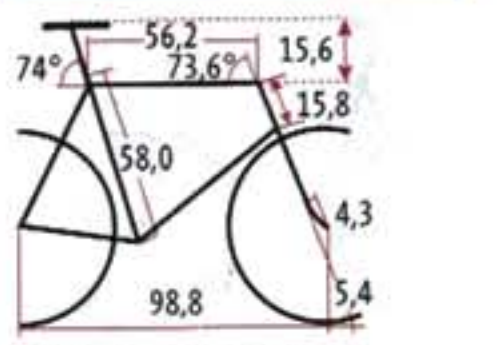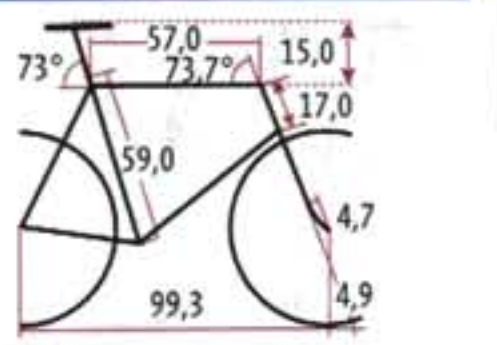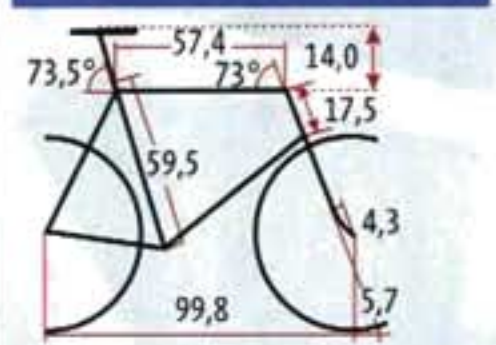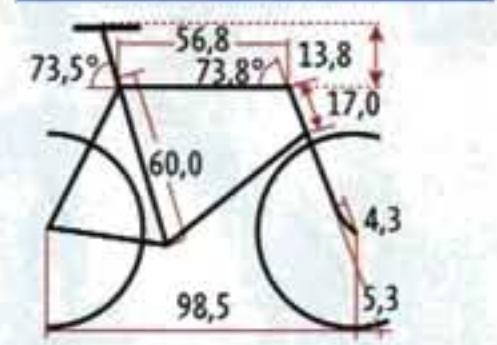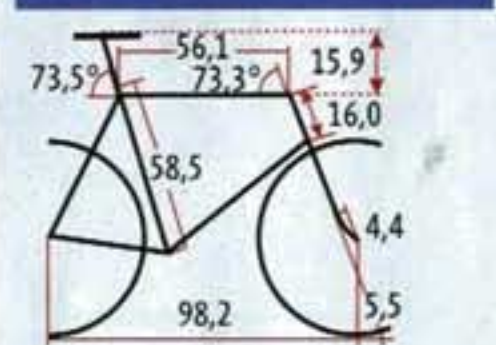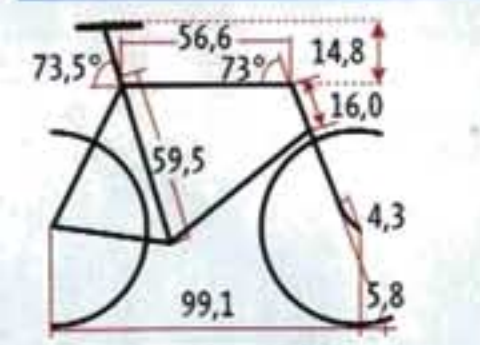

49, 52, 54, 56, 58, 61 cm

48, 51, 54, 56, 58, 61 cm

49, 52, 54, 56, 58, 61 cm

48, 50, 52, 54, 56, 58, 60, 63

S, M, ML, L, XL

49, 51, 53, 55, 57, 59 cm

796/352/88 g  
 1.237 g  
 91 Nm/°  
 46 N/mm  
 51 N/mm  
 263 N/mm  
 97 N/mm  
 114 Nm/°/kg

826/388/58 g  
 1.289 g  
 94 Nm/°  
 59 N/mm  
 65 N/mm  
 202 N/mm  
 143 N/mm  
 114 Nm/°/kg

997/402/62 g  
 1.460 g  
 94 Nm/°  
 49 N/mm  
 60 N/mm  
 190 N/mm  
 110 N/mm  
 94 Nm/°/kg

1.093/389/77 g  
 1.538 g  
 81 Nm/°  
 45 N/mm  
 60 N/mm  
 232 N/mm  
 86 N/mm  
 74 Nm/°/kg

1.135/387/57 g  
 1.586 g  
 78 Nm/°  
 42 N/mm  
 54 N/mm  
 203 N/mm  
 72 N/mm  
 69 Nm/°/kg

1.150/388/75 g  
 1.629 g  
 78 Nm/°  
 44 N/mm  
 53 N/mm  
 188 N/mm  
 96 N/mm  
 68 Nm/°/kg

